

Panasonic
ideas for life

AG-DV2500
DV/Mini-DV Recorder



DV Mini **DV**



Versatile and conver



Records and Plays Standard DV and Mini-DV Tapes, and Plays DVCAM Tapes

The AG-DV2500 records and plays both standard DV and Mini-DV cassettes in SP mode, and plays both large and small DVCAM tape cassettes. It can record for up to 276 minutes on a standard DV cassette (AY-DV276AMQ).

DV (IEEE1394) Digital Input/Output

The AG-DV2500 is equipped with an IEEE1394-compliant 4-pin DV terminal. This makes a host of operations possible, including synchronized recording with a DV camera-recorder, digital dubbing with a DV recorder, uploading to the PC in a nonlinear editing system, and downloading after editing.

RS-422A Interface

The AG-DV2500 is equipped with a 9-Pin RS-422A interface. This lets you operate the AG-DV2500 using an RS-422A remote controller such as our AJ-A95 or an editing controller such as our AG-A850.

*The AG-DV2500 has no editing functions. Use it as the source machine in an editing system.

High-Quality PCM Audio

Two audio modes are provided: 2-channel (16-bit, 48-kHz sampling) and 4-channel (12-bit, 32-kHz sampling). In 4-channel mode, open channels can be used later to dub in narration or other audio.

Compatible with Both NTSC and PAL

The AG-DV2500 automatically detects and plays DV footage recorded in NTSC or PAL, making it easy to upload footage to a nonlinear editing system. The AG-DV2500 can also record in either NTSC or PAL mode; simply set the switch on the rear panel to the mode desired. Recording onto standard DV and Mini-DV cassettes is possible in both formats.

*Cannot be used as an NTSC/PAL format converter.

*NTSC and PAL signals cannot both be input at the same time.

Wireless Remote Control

The AG-DV2500 is equipped with a multifunctional wireless remote control. In addition to controlling basic operations, the remote can be used to display menus, show the color bar, select audio output, search for blank sections of the tape, and perform other functions.



Search, Jog & Shuttle

The AG-DV2500 can search at up to 9x normal speed for quick time-code cueing. Jog & shuttle searches are also possible using the optional 9-pin AJ-A95 Remote Controller.

Time-Code Recording and Playback

The AG-DV2500 comes equipped with a time code reader and generator.

Index Search, Blank Search

The AG-DV2500 can quickly locate index signals recorded onto the tape and blank sections of tape.

Tower Placement

Save valuable space by using the AG-DV2500 vertically with the stand provided. This saves space in crowded areas around the PC in a nonlinear editing system.




Other Functions

- Analog in/out (Y/C, composite)
- Mic input jack for dubbing in narration
- Internal settings and adjustments can be made via on-screen menu

Convenient DV Recorder


AG-DV2500 Applications

1 DV Non-Linear Edit Feeder

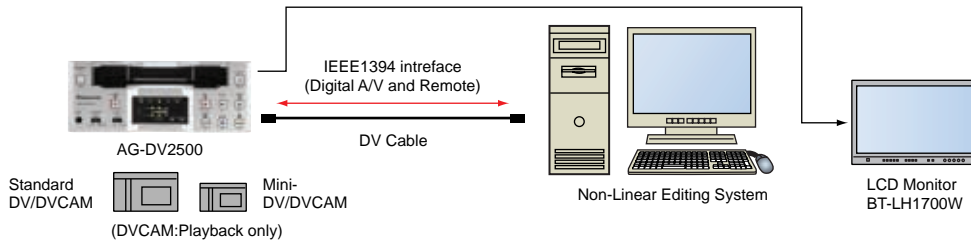


Upload AV data to the non-linear editing system, then download it after editing. The ability to send and receive VTR control signals enables batch processing when capturing footage by simply registering the time code IN/OUT points.

2 Linear Editing System Player

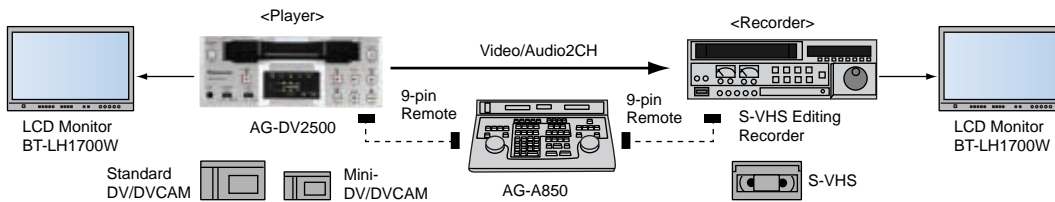

The AG-DV2500 is ideal as the source machine in a linear editing system. Or, combine it with the AG-A850 Editing Controller (with RS-422A remote controller) and the conventional S-VHS Editing Recorder to easily configure a cut editing system.


3 DV Camera Digital Back-up(Syncro Lock Function)/Dub Recorder

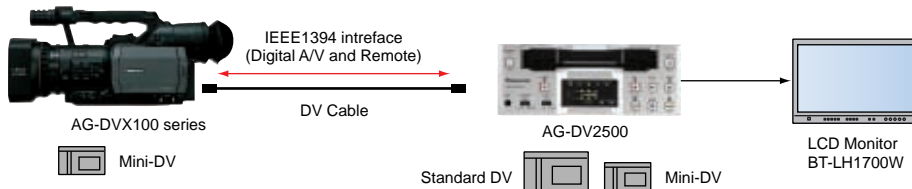

The AG-DV2500 can be linked to the rec start/stop operation of the Panasonic AG-DVX100 series or AG-DVC30 mini-DV camera-recorder for back-up or dub recording.

Select from the following three linking modes: Link with camera recording, start AG-DV2500 recording as the camera-recorder approaches the end of the tape, or record only with the AG-DV2500.



4 A/D, D/A Converter

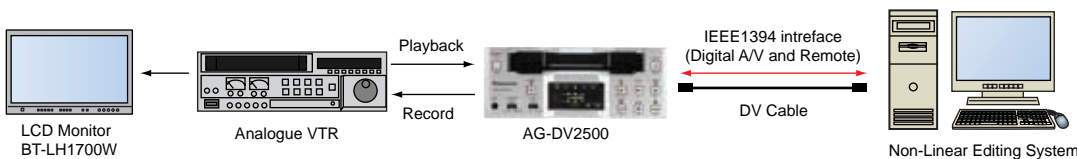

The AG-DV2500 features analog input/output (YC, composite). You can input an analog signal and convert it to a digital signal, or convert a digital signal to analog. This makes it possible to use the AG-DV2500 as an A/D, D/A converter for applications such as uploading analog material to a non-linear editing system, or sending data from the non-linear editing system to an analog VTR.

5 Office Viewer

Easily preview DV data or check edited tapes. Lightweight at only 2.3 kg(5.1lbs), the AG-DV2500 can easily be carried anywhere for on-the-spot playback.

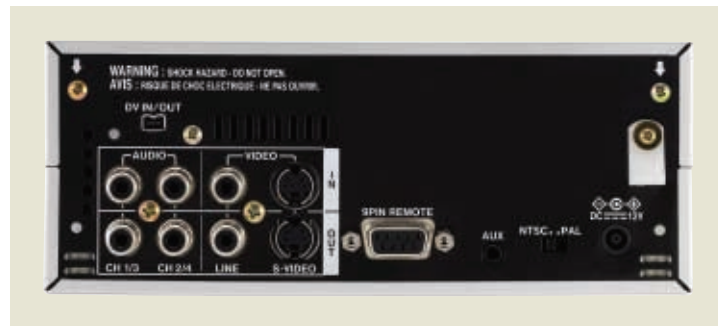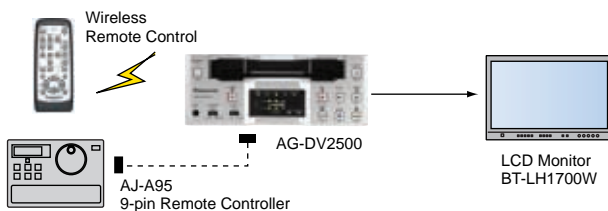

Standard Accessories



Wireless Remote Control Unit x 1
AC Adaptor x 1
AC Cable x 1(NTSC Area) x 2(PAL Area)
Stand(for vertically placing) x 1

Optional Accessories



AG-A850
(Edit Controller)



AJ-A95
(Remote Controller)



IEEE1394 Interface cable

Recommended DV Tape

Master Series Tape



AY-DV96AMQ



AY-DV124AMQ



AY-DV186AMQ



AY-DV276AMQ

Professional Series Tape



AY-DV96PQ



AY-DV124PQ



AY-DV186PQ



AY-DVCLB

Mini-DV Tape

Master Series Tape



AY-DVM33AMQ
AY-DVM48AMQ
AY-DVM63AMQ

Professional Series Tape



AY-DVM63PQ

Cleaning Tape



AY-DVMCLA

DV Digital Video Cassette

Mini DV Digital Video Cassette

Specifications

[General]

Power supply: DC12V
AC100V - 240V, 50/60Hz(w/AC adaptor)
Power Consumption: approx. 14W
Operating Temperature: 5°C - 35°C
Operating Humidity: 30% - 80%
Dimensions(WxHxD): 174 x 68 x 260mm (6-7/8" x 2-11/16" x 10-1/4")
Weight: approx. 2.3Kg (5.1 lbs)(Main unit only)

[VTR]
Video Signal: 525i / 625i,
Rec : Switchable, Playback : Automatically detect
Recording Format: DV Format (SP mode only)
Usable Tape: Standard DV / MiniDV
Playback Format: DV(SP mode only), DVCAM
Tape Speed: 18.812mm/sec.(NTSC), 18.831mm/sec.(PAL)
Rec/Playback Time: 276 min (with AY-DV276MQ)

[Video]
Sampling Frequency: Y : 13.5MHz 4:1:1 (NTSC)/4:2:0(PAL)
Quantizing: 8bits


[Audio]

Sampling Frequency: 48kHz / 32kHz
Quantizing: 16bits / 12bits

[Connectors]
Video Input: Phono x 1, analogue composite
S-Video Input: DIN 4pin x 1
Audio Input: Phono x 2 (CH1,CH2)
Microphone Input: M3 x 1
Video Output: Phono x 1, analogue composite
S-Video Output: DIN 4pin x 1
Audio Output: Phono x 2 (CH1,CH2)
DV In/Out: IEEE1394 (4pin) x 1
Remote: RS-422A (D-sub 9pin x 1)

[Standard Accessories]
*AC Adaptor x 1
*AC Cable x 1(NTSC Area) x 2(PAL Area)
*Wireless Remote Control Unit x 1
*Stand(for vertically placing) x 1
**"AA" Battery x 2

Dimensions

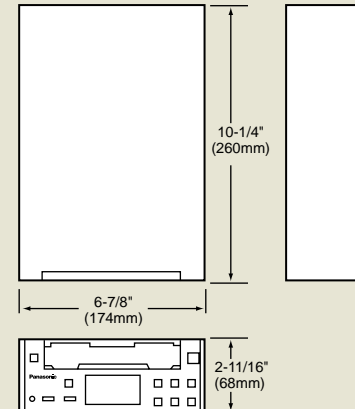

Panasonic

Matsushita Electric Industrial Co., Ltd.
Systems Business Group
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
Tel. 81-6-6905-4650 Fax. 81-6-6908-5969
<http://www.pavc.panasonic.co.jp/pro-av/>

[Countries and Regions]

Argentina	+54 114 308 1610	Korea	+82 2 2106 6641
Australia	+61 2 9887 6222	Kuwait	+965 481 2123
Austria	+43 (0)1 610 80 773	Lebanon	+961 1 216827
Bahrain	+973 252292	Malaysia	+60 3 5549 5422 (PSE)
Brazil	+32 (0)2 481 04 57		+60 3 5546 7000 (PM)
Bulgaria	+359 2 946 0786	Mexico	+52 55 5488 1000
Brazil	+55 11 3889 4035	Montenegro, Serbia	+41 (0)26 466 25 20
Canada	+1 905 624 5010	Netherlands	+31 73 64 02 577
China	+86 10 6515 8828	New Zealand	+64 9 272 0100
(Hong Kong)	+852 2313 0888	Norway	+47 67 91 78 00
Czech Republic	+420 236 032 552/511	Pakistan	+92 5370320 21
Denmark	+45 43 20 08 57	Panama	+507 229 2955
Egypt	+20 2 3938151	Peru	+51 1 614 0000
Finland, Latvia, Lithuania, Estonia	+358 (9)521 52 53	Philippines	+63 2 633 6162
	+33 (0)1 55 93 66 67	Poland	+48 (22)338 1100
France	+49 (0)611 235 481	Portugal	+351 21 425 77 04
Germany	+30 210 96 92 300	Puerto Rico	+1 787 750 4300
Greece	+36 (1)382 60 60	Romania	+40 21 211 4855
Hungary	+62 21 385 9449	Russia & CIS	+7 095 258 42 06
Indonesia	+98 21 2271463	Saudi Arabia	+966 1 465 0709
Iran	+39 02 67 88 449	Singapore	+65 6270 0110
Italy	+961 6 586 1914	Slovak Republic	+421 (0)2 52 92 14 23
Jordan	+7 3272 504 777	Slovenia, Croatia, Bosnia, Macedonia	+44 (0)20 76 63 36 57
Kazakhstan			

South Africa	+27 11 313 1400
Spain	+34 (93) 425 93 00
Sweden	+46 (8) 680 26 41
Switzerland	+41 (0)41 259 96 32
Taiwan	+886 2 2725 9100
Thailand	+66 2 731 8888
Turkey	+90 216 578 3700
U.A.E.	+971 4 282201
Ukraine	+380 44 4903437
	+380 44 4903438
	[ext. 112]
U.K.	+44 (0) 1344 70 69 20
U.S.A.	+1 201 348 5300



SP-DV2500PE3



17K507AM-3 Printed in Japan