

SP U-matic Player

BVU-920 (with Dynamic Tracking System)




- **The advanced Dynamic Tracking (DT) System:** high quality noiseless DT pictures in the range from -1 to +3 times normal speed available. (with the BKU-901A optional Plug-in TBC)—**BVU-920**
- **Dynamic Motion Control (DMC)** capability
To control DT playback picture speeds via the DMC function of the Editing Control Unit such as the BVE-600, BVE-910.—**BVU-920**
- **Superior Performance (SP) Technology** for excellent quality picture through multi-generation recording.
- **Interchangeable with conventional format**
- **Dolby C-Type Noise Reduction System** for superior sound quality.
- **BKU-901A Plug-in Time Base Corrector (optional)**
For DT playback.—**BVU-920**
Return SC direct processing for time base error compensation, maintaining picture quality.
- **BKU-902 Plug-in Digital Noise Reducer (optional)**
Dramatically improves S/N ratio up to 6 dB. (with the BKU-901A)
- **Auto freeze function:** freeze picture available at the editing in point or standby off point. (with the BKU-902)
- **Dial Menu Operation** via search dial for user convenience:
Display of time code character on the monitor screen.
Setting preroll time, etc.
- **Jog/Shuttle Dial** for high speed and precise picture search.
Jog: frame by frame tape control
Shuttle: STILL, 1/30, 1/15, 1/5, 1/2, 1, 2, 5, 10 times normal speed in the forward and reverse directions.
(Noiseless playback pictures in the range from -1 to +3 times normal speed in the VAR mode.—**BVU-920**)
- **9-pin REMOTE Interface** (RS-422 serial): to be directly interfaced with BVH/BVW/BVU series VTR or BVE series or RM-450 Editing Control Unit to configure high grade editing systems.

SP U-matic Player

BVU-900



- **19" Rack Mountable** with the RMM-950 (for 19" EIA standard rack) or RMM-501 (for Sony SU series) Rack Mount Kit.

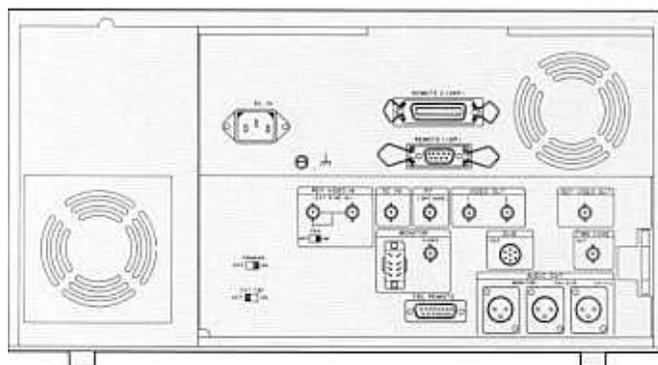

BVU-920/900 rear panel

Connectors		MONITOR OUT:	
VIDEO IN	—BNC	TV	—8-pin
REF VIDEO IN	—BNC	VIDEO	—BNC
REF VIDEO OUT	—BNC	AUDIO	—XLR
SC IN	—BNC	HEADPHONES	—Phone Jack
RF (OFF TAPE)	—BNC	REMOTE	—9-pin
DUB OUT	—7-pin		—24-pin
AUDIO LINE OUT	—XLR (M)		—TBC
TIME CODE OUT	—BNC		

SUPPLIED ACCESSORIES

- AC Power Cord (1)
- VDC-5 Dubbing Cable (5m) (1)
- RCC-5G Remote Control Cable (9-pin to 9-pin) (1)
- Extension Board (small-1, large-1) (2)
- Operation and Maintenance Manual (1)

OPTIONAL ACCESSORIES

- BKU-901A Plug-in Time Base Corrector
- BKU-902 Plug-in Digital Noise Reducer
- BKU-906 Control Panel Extension Kit (to be used with the BK-803)
- BK-803 Control Panel Case (to be used with the BKU-906)
- RMM-950 Rack Mount Kit